

**MACH 10**  
 REF. AC45303-8665




ROOFTOP AIR CONDITIONER  
 3950 WATTS COOLING CAPACITY  
 1600 WATTS ELECTRICAL HEATING


- REPLACES BOTH THE MACH 3 Plus AND THE ROUGHNECK
- REDUCED HEIGHT AND WEIGHT
- MECHANICAL CONTROLS FOR RELIABILITY AND DURABILITY

Cooling Capacity		3,95 kW (13500 BTU/h)
Heating		1,60 kW (5500 BTU/h)
Power Supply		220-240 V, 50 Hz, 1 phase
Breaker		10 A
Start-up Amps		24 A (up to) / 0,15 s.
Amps Cooling	at 35°C and 50% humidity	5,5 A
Amps Cooling	at 48°C and 30% humidity	6,5 A
Amps Heating		7,4 A
Running Watts Cooling	at 35°C and 50% humidity	1270 W
Running Watts Cooling	at 48°C and 30% humidity	1495 W
Running Amps Heating		1700 W
Refrigerant		R 410A
Fan Speeds		2
Maximum Air Flow		470 m3/h
Dimensions	Roof Unit	L 97 x l 67 x H 30 cm
Dimensions	Ceiling Assembly	L 56 x l 54 x H 5 cm
Roof opening		36 x 36 cm
Roof Thickness		up to 15 cm
Weight	Roof Unit	38 Kg
Weight	C/A and heater	4,- Kg

### ROOF TOP UNIT DIMENSIONS

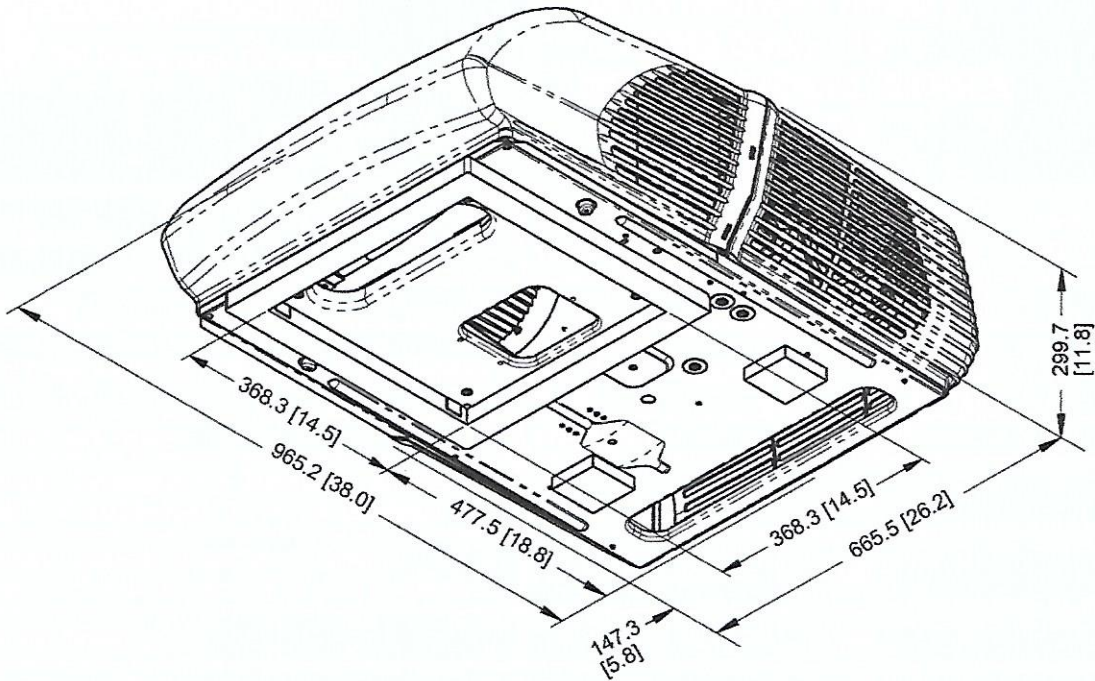

### CEILING SHROUD DIMENSIONS

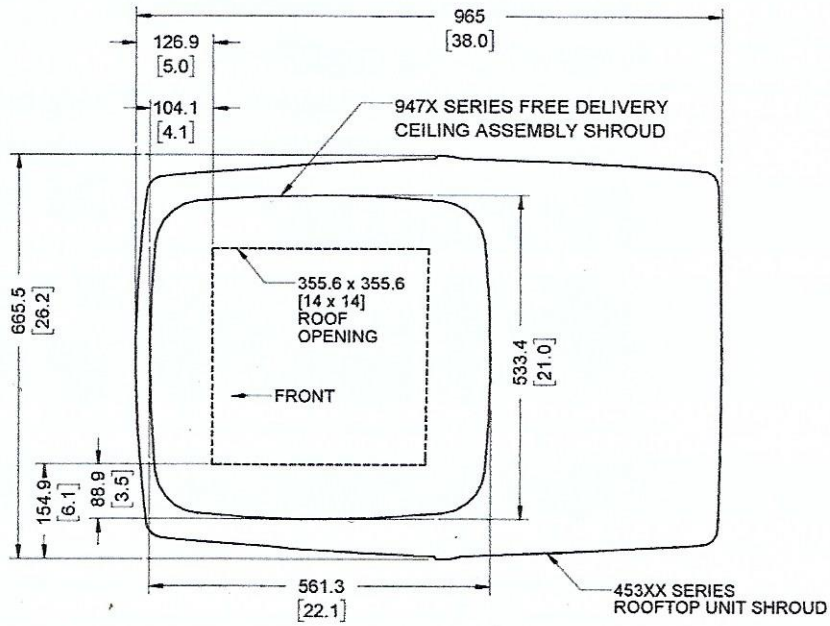

### QUICK REFERENCE CHART

DIMENSIONS (mm/inches)		
Exterior Shroud	Height	300 / 11.8
	Width	665 / 26.2
	Length	965 / 38.0
Interior Shroud	Depth	56 / 2.2
	Width	533 / 21.0
	Length	562 / 22.1